



Office de la Propriété  
Intellectuelle  
du Canada

Un organisme  
d'Industrie Canada

Canadian  
Intellectual Property  
Office

An agency of  
Industry Canada

CA 2418569 A1 2004/08/06

(21) **2 418 569**

(12) **DEMANDE DE BREVET CANADIEN**  
**CANADIAN PATENT APPLICATION**

(13) **A1**

(22) Date de dépôt/Filing Date: 2003/02/06

(41) Mise à la disp. pub./Open to Public Insp.: 2004/08/06

(51) Cl.Int.<sup>7</sup>/Int.Cl.<sup>7</sup> E04B 5/00, E04F 15/00


(71) Demandeur/Applicant:  
EBERLE, HARRY W., III, US

(72) Inventeur/Inventor:  
EBERLE, HARRY W., III, US

(74) Agent: OGILVY RENAULT

(54) Titre : **SYSTEME DE PLATELAGE ET DISPOSITIF D'ANCRAGE**

(54) Title: **DECKING SYSTEM AND ANCHORING DEVICE**

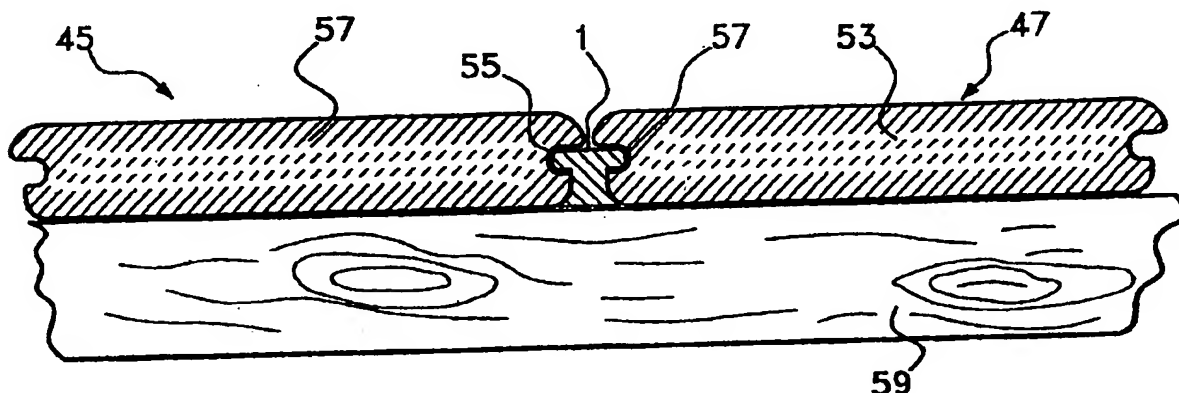

(57) **Abrégé/Abstract**

The present invention is an anchoring device for joining three boards. It includes a substantially flat horizontal top element having a top view configuration which includes two sides and has a first predetermined width as measured wide to side at its maximum width between the two sides. There is at least one substantially vertical support member attached to the underside of the top element along an imaginary center line and extending downwardly from the top element for a predetermined length, which has two sides and a second predetermined width as measured side to side at its maximum width. There is a substantially flat horizontal bottom element which includes two sides and has a third predetermined width as measured side to side at its maximum width. The first predetermined width is greater than both the second predetermined width and the third predetermined width, and the third predetermined width is greater than the second predetermined width. The invention also includes a decking system utilizing the anchoring device.



ABSTRACT OF THE DISCLOSURE

The present invention is an anchoring device for joining three boards. It includes a substantially flat horizontal top element having a top view configuration which includes two sides and has a first predetermined width as measured wide to side at its maximum width between the two sides. There is at least one substantially vertical support member attached to the underside of the top element along an imaginary center line and extending downwardly from the top element for a predetermined length, which has two sides and a second predetermined width as measured side to side at its maximum width. There is a substantially flat horizontal bottom element which includes two sides and has a third predetermined width as measured side to side at its maximum width. The first predetermined width is greater than both the second predetermined width and the third predetermined width, and the third predetermined width is greater than the second predetermined width. The invention also includes a decking system utilizing the anchoring device.

-2-

DECKING SYSTEM AND ANCHORING DEVICEBACKGROUND OF THE INVENTION1. Field of the Invention

5           The present invention is directed to an improved anchoring device for joining adjacent boards, e.g. decking systems, more specifically, the invention is an anchoring device, as well as a system containing an anchoring device and

10           decking boards in combination. The system provides the ability for pre-setting distances between adjacent boards and attaching to at least one joint board while securing at least one adjacent board. Thus, the anchoring device

15           physically joins two adjacent boards in the same plane to a third, supporting board.

-2-

-3-

2. Information Disclosure Statement

The following patents are representative of the state of the art for wood joining devices, equipment and methods:

5

U.S. Patent No. 1,184,080 to D'Arcy

10

describes a structure of the class described, the combination of frame pieces disposed at an angle to each other and plate-like corner irons having angularly disposed flanges, said corner irons being arranged in opposed pairs on the sides of and secured to the ends of meeting frame pieces with their flanges engaging the inner edges thereof in overlapping telescoping relation to each other, the inner flanges having vertical nail slots therein and brads on their edges

15

driven into the frame pieces, the outer flanges

-3-

-4-

having nail perforations opposite the nail slots,  
there being nails disposed through the said  
perforations and slots and driven into the frame.

U.S Patent No. 2,332,081 to G.M. Hunt et al.  
5 is directed to a wooden panel. It is described as  
a panel comprising wooden strips joined along  
their edges with glue, each strip having at least  
one groove in its edge matching groove in the  
edge of the adjoining strip, an asbestos  
10 millboard spline fitted in the matching grooves  
and bridging the joint between the strips,  
crossbands covering the strips on both sides of  
the panel, and veneers covering the crossbands.

U.S. Patent No. 2,362,252 to Ellinwood  
15 describes a wall structure of the character  
described comprising a pair of adjacent wallboard

-4-

-5-

panels having meeting edges, each of said panels  
being formed with a groove opening into its  
meeting edge, the groove in each panel providing  
an outer lip and an inner lip, said outer lips  
5 being in abutting relation, a joining strip  
permanently secured to the under surface of said  
outer lips, said inner lips being spaced, a T-  
shaped connecting member movably positioned in  
said groove and having a base in spaced relation  
10 to said inner lips, and means for anchoring said  
connecting member to a structural element.

U.S. Patent No. 2,398,603 to Soderberg  
describes a joining staple, comprising a metal  
body having at least two portions extending at  
15 right angles to each other and at least two teeth  
carried upon each of said portions, each of said

-5-

-6-

teeth consisting of a flat substantially rectangular body having a cutting edge extending substantially parallel to its body portion, the cutting edges of all of said teeth being located in one plane, each of said portions having another cutting edge extending between the teeth of that portion, the second mentioned cutting edges being also located in one plane.

U.S. Patent No. 2,406,387 to Lank describes the method of constructing a plurality of wooden posts each of which has a connector element incorporated therein adjacent each end thereof which method comprises forming a plurality of longitudinally extending grooves in one side of each of a pair of wooden blanks from which the posts are to be formed, forming a transverse

-6-

-7-

groove adjacent each end of said side of each of  
said blanks with the transverse grooves  
intersecting the longitudinal grooves, providing  
a pair of connector retaining members with a  
5 plurality of seats for receiving connector  
elements, the number and spacing of said seats in  
each of said connector retaining members  
conforming to the number and spacing of the  
longitudinal grooves in each of said blanks,  
10 placing connector elements in each of said seats,  
positioning said blanks with their grooved sides  
together and with said connector retaining  
members in said transverse grooves, bonding said  
blanks together, and severing the thus bonded  
15 assembly along longitudinal lines intermediate  
said longitudinal grooves.

-7-

-8-

U.S Patent No. 4,641,988 to Ganner is directed to a fitting for releasably joining two structural components. It is illustrated for releasably joining two structural components particularly plate-shaped structural components which extend at a right angle relative to one another, a fitting has a preferably cylindrical locking element which can be inserted either directly in a bore in the first structural component or it can be inserted indirectly in a housing, and a holding piece with a holding projection anchored in the second structural component. In the assembled position, the holding projection & abuts against one or two gripping surfaces of the locking element which gripping surfaces are of, for example, eccentric shape,

-8-

-9-

and the holding projection is pulled toward the locking element when the locking element is turned. The holding piece is constructed plate-shaped and is insertable in a slot in the second structural component.

5

U.S. Patent No. 4,682,458 to Sparrow

describes a floor composed of parallel spaced beams having flanges and blocks of polystyrene foam which are laid on the flanges to bridge the gaps between the beams. Boards are laid on the polystyrene blocks, and are supported by the blocks, which form load-bearing members of the floor. The blocks may have flanged portions extending over the beams, so as to provide heat insulation.

10

15

U.S Patent No. 5,004,027 to Legler et al

-9-

-10-

illustrates a biscuit joiner. It is described as  
a biscuit joiner for cutting semi-elliptical  
slots in opposing edges of workpieces which are  
to be joined along those edges includes a housing  
5 adapted to be mounted upon the quill of a multi-  
purpose woodworking tool, which housing encloses  
a rotary saw blade adapted to be attached to a  
spindle projecting from the quill on which the  
housing is mounted. A spring loaded guide  
10 projects from the front face of the housing and  
has a slot therethrough, so that when the front  
face of the guide is engaged by an edge of a  
workpiece to be slotted the guide can be pushed  
inwardly against spring pressure, allowing the  
15 rotary saw blade to be exposed and form a slot in  
the edge of the workpiece. Adjustable stops are

-10-

-11-

provided on the guide so that a desired depth of cut will automatically be made after adjustment.

An alternative construction of this biscuit

joiner is especially adapted for use in

5 conjunction with a conventional drill press, with the arbor which carries the saw blade being clamped in the chuck on the drive spindle of the drill motor.

U.S. Patent No. 5,071,280 of Turner.

10 describes a sheet metal connector that is provided for use with timber building components of the type that has nails to be driven through the sheet metal into the timber. The connector has substantially U-shaped cuts in the sheet  
15 metal to define nailing tongues. The nailing tongues have a deformation for use in providing a

-11-

-12-

nail entry point so that a nail driven therethrough will serve to drive the nailing tongue into the timber.

5 U.S. Patent No. 5,160,211 to Gilb describes a connector for securing a wood railing to a wood post by fasteners which are in shear in relation to all forces imposed upon the railing. The connector is a single piece sheet metal member formed in a generally triangular cross section with openings provided for the insertion of the fasteners. The connector is placed on the underside of the railing to eliminate all top nailing or driving of screws through the top side of the rail.

10

15 U.S. Patent No. 5,182,891 to Slocum describes a flooring construction which is

-12-

-13-

provided having a unitary construction with a top layer providing a finished flooring surface and an insulation layer adjacent the top layer. The flooring panel includes an upper portion and a lower portion. The upper portion has a larger dimension than the lower portion and extends outwardly beyond the lower portion. A recessed portion between the upper portion and the lower portion defines a channel. A plurality of interlock support elements having a vertical web and an upper horizontal flange are arranged so that the horizontal flange extends into the channel. The vertical web extends below the lower portion to raise the flooring.

U.S. Patent No. 5,251,996 to Hiller et al describes a connecting element for connecting two

-13-

-14-

parts generally in a connection plane has a first  
portion for connecting the element relative to a  
first of the parts and second portion for  
connecting the element relative to the second  
5 part. The second portion includes actuation  
members which on relative movement of the parts  
substantially along the connection plane urge the  
parts forcefully towards each other.

U.S. Patent No. 5,377,732 to Fujii et al  
10 illustrates a wood joining structure and method  
thereof. It is described as a technique is  
provided for joining wood members. A plurality of  
slits are formed on the end portions of wood  
pieces desired to be joined, and the end portions  
15 are abutted with corresponding slits in alignment  
to form a common surface. Each of the abutted

-14-

-15-

wood end portions is fixed by temporary fixing means to a desired joining state. Thereafter, an adhesive agent is applied into the interior surfaces of the slits. Connecting plates, e.g.,  
5 made of a reinforced plastic material coated with the adhesive agent, are inserted into the aligned slits. The adhesive agent is then hardened.

U.S. Patent No. 5,419,649 to Gilb describes an intermediate rail to post connection including  
10 a sheet metal connector for attaching a wood intermediate rail to a wood post is disclosed. The sheet metal connector is preferably formed with a base member, an integral seat member and a post engaging flange. Preferably four fasteners  
15 which may be either screws or nails are inserted through suitable openings in the sheet metal

-15-

-16-

connector. Two of the fasteners pierce the sheet metal connector, the intermediate rail and the post in such a way as to be in double shear. The other two fasteners are inserted through the sheet metal connector directly into the wood post. The sheet metal connector is placed on the underside of the intermediate rail and all fasteners are therefore inserted from the underside of the intermediate rail.

U.S Patent No. 5,458,433 to Stastny explicates a biscuit and joint made using same. It is described as a biscuit having octagonal outer periphery is used to form a joint between first and second workpieces. The biscuit fits within arcuate slots formed in the workpieces, with glue placed in the slots and/or on the

-16-

-17-

biscuit before the joint is put together. The biscuit is made of an anhydrous compressed wood.

U.S. Patent No. 5,480,117 to Fleming, III describes a bracket for mounting a rotary lock member in the frame of a panel which is provided. The bracket is a preferably U-shaped body having a base and two legs extending therefrom. The inner dimension of the bracket is chosen to allow insertion of a rotary lock member therein. Panel engaging steps and protrusions are located on the outside surface of each leg for engaging the frame material. The legs of the bracket are biased inwardly towards one another, such that when a locking member is inserted therein, the legs are pressed outwardly, driving the protrusions into the frame material. A number of

-17-

-18-

bores are located in the bracket to allow supplemental locking members to lock the bracket to the frame.

U.S Patent No. 5,529,428 to Bischof is directed to a metallic structural element for connecting workpieces consisting of wood, woodworking material or plastic. It is described as a metallic structural element for connecting workpieces consisting of wood, woodworking material or plastic, consisting of a lamellar part, which provides the non-positive connection with the first workpiece provided with a groove and a transverse hole, and a bolt-like part which, through screwing or pinning, realizes the non-positive connection with the second workpiece provided with a longitudinal hole. The lamellar

-18-

-19-

part has, in the center, a hole which is at right angles to the plane of the lamella and is intended for fixing in the groove of the workpiece. Variants having a wing-like long or rectangular short lamellar part and a bolt-like part in the form of a conical wood screw, cylindrical screw, screw having a metal thread, threaded sleeve or pin. Accessories: screwing tool and drilling template.

10

U.S Patent No. 5,564,248 to Callies

describes a construction hanger for supporting a joist, rafter or the like to a support beam, in which the hanger is provided with a holddown tab for insuring proper seating of the joist to hanger during the installation process. The invention also relates to a method of making such

15

-19-

-20-

a hanger.

U.S. Patent No. 5,603,580 to Leek et al describes a positive fastener-angling device for positioning an elongated fastener with respect to the face of a sheet metal connector and a wood member only at a preselected angle which is substantially less than 90 degrees by forming a slit-cut in the sheet metal connector by means of a die which progressively at the same station, forms a fastener guideway in the shape of a half cone. The fastener opening and the guideway are dimensioned so that the fastener can only penetrate the sheet metal connector at a preselected angle set at the factory.

U.S. Patent No. 5,660,016 to Erwin et al describes an extruded plastic decking plank for

-20-

-21-

mounting to an underlying support structure, the plank having a rigid foam core, a resilient outer plastic shell, and a clamping portion for securing the plank to the support structure. The top surface of the plank can be provided with a non-slip surface. The invention also includes an attachment system for securing such decking planks to a support structure by engaging the clamping portions of the decking planks onto clamps or hold down blocks which are secured onto the support structure, and which permit relative motion between the planks and the structure in the planks' lengthwise direction to prevent stress and buckling caused by uneven expansion.

Notwithstanding the prior art, the present invention is neither taught nor rendered obvious

-21-

-22-

thereby.

SUMMARY OF THE INVENTION

The present invention is an anchoring device for joining three boards. It includes a substantially flat horizontal top element having a top view configuration which includes two sides and has a first predetermined width as measured side to side (This first predetermined width is measured at a maximum width between the two sides). The top element has an imaginary center line and there is at least one substantially vertical support member attached to the underside of the top element along the imaginary center line and extending downwardly therefrom for a predetermined length. This substantially vertical support member has two sides and a

-22-

-23-

second predetermined width as measured side to side at its maximum width. There is also a substantially flat horizontal bottom element having a flat bottom view configuration which includes two sides and has a third predetermined width as measured side to side at its maximum width.

The first predetermined width is greater than both the second predetermined width and the third predetermined width, and the third predetermined width is greater than the second predetermined width. By this configuration, the present invention anchor device is adapted to maintain the top element in a predetermined position during use for joinder of two adjacent boards which have been pre-cut with receiving

-23-

-24-

slots, and to position the bottom element upon a support board on which the two adjacent boards rest for attachment of the anchoring device to the support board for anchoring and support of the two adjacent boards.

Preferably, the anchoring device bottom element has a generally trapezoidal shape with its greatest width at a trapezoidal base. Also, the vertical support member may have a plurality of recesses with support columns located therebetween.

The anchoring device of the present invention may be fabricated with any available material, but is preferably made of molded plastic material capable of having a metal fastener driven through.

-24-

-25-

The present invention also relates to a decking system. It includes a plurality of decking boards, each decking board having a top, a bottom, two sides, and two ends, and at least one groove located along one of the sides. Preferably, there is a groove on both sides, except that end pieces may only have one groove. The groove adapted to receive the anchoring device described above, which is included in the system.

In preferred embodiments, the boards have an upper portion above the slots which is wider than a lower portion below the slots.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The present invention should be more fully understood when the specification herein is taken

-25-

-26-

in conjunction with the drawings appended hereto  
wherein:

Figure 1 illustrates a top view of one  
preferred embodiment of the present invention  
5 anchoring device, Figure 2 illustrates a front  
view, and Figure 3 illustrates an end view  
thereof;

Figure 4 illustrates a detailed end view of  
the present invention anchoring device shown in  
10 Figures 1, 2 and 3, with relative width  
illustrated;

Figures 5 and 6 show alternative embodiment  
top views of present invention anchoring devices;

Figure 7 shows an end view of the present  
15 invention device shown in Figures 1 through 3 but  
being attached to a joist and a first deck board

-26-

-27-

and a second deck board where both deck boards are supported by that joist; and

Figure 8 shows an end view of a preferred present invention decking system board.

5

DETAILED DESCRIPTION OF THE PRESENT INVENTION

10

In Figure 1, there is shown a top view of present invention anchoring device 1. Device 1 includes a top element 2 having a flat top surface 3 as shown, and a top view shape of a rectangle. It includes walls 5 and 7, which are parallel to one another in preferred embodiments, but need not be parallel to be within the scope of the present invention. In this case, they are perfectly symmetrical and have flat sidewalls 5 and 7. Perfect symmetry is preferred but not essential. Without exceeding the scope of the

15

-27-

-28-

present invention, these top element shapes could be slightly modified, such as having non-linear segments, e.g., arcs or linear segments at angles.

5           Top element 2 also includes an imaginary attachment line 8 below which extends a vertical support member and a bottom element.

          Figures 2 and 3 show front and end (right side) views, respectively of device 1 shown in Figure 1. Thus, device 1 includes top element 2.  
10           a vertical support member 4 with walls 9 and 11, and recesses such as recess 17, creating support columns, such as column 15. Bottom element 6 has a substantially flat horizontal bottom surface 21  
15           and tapered walls 13 and 15. Anchoring device 1 has a predetermined height so as to rest on a

-28-

-29-

joist in such a way as to establish anchor top  
element 2 at a predetermined height from the  
joist for attachment of two adjacent boards  
thereto which have pre-cut slots corresponding  
thereto.

5

Figure 4 shows a blown up end view of  
anchoring device 1 as shown in Figure 3, with  
identical parts identically numbered in part, and  
with width designations, as illustrated.

10

Specifically, in Figure 4, top element 2 has a  
width  $W_{TB}$ , as measured from side to side at its  
maximum width. Vertical support member 4 has  
width  $W_M$ , as measured from side to side at its  
maximum width. Likewise, bottom element 6 has a  
width  $W_B$ , as measured from side to side at its  
maximum width. It is important to note that  $W_T$ ,

15

-29-

-30-

the first predetermined width, being the width of  
top element 2, is greater than both  $W_N$ , the  
predetermined width of vertical support member 4,  
as well as  $W_B$ , the predetermined width, being a  
5 third predetermined width of bottom element 6.

In other words, the width of the top element is  
greater than both the width of the vertical  
support member and the width of the bottom  
element. Moreover, the width of bottom element  
10 6,  $W_B$ , while it is less than width  $W_T$  of top  
element 2, it is also greater than the width of  
vertical support member 4,  $W_B$ . These critical  
relationships allow for maximum support of  
adjoining slotted boards while minimizing the  
15 space between the boards to typical or  
conventional deck spacing.

-30-

-31-

Figure 5 and Figure 6 show top views, respected with, of present invention anchoring device 31 and 41 to nearly illustrate that the top view of the top element need not be of parallel sides. Anchoring device 31 of Figure 5 has parallel sides which are tapered at both ends while anchoring device 41 of Figure 6 has subsequently not parallel, non-symmetrical sides. Parallel, symmetrical, mirror image sides are preferred in the present invention anchoring device but as now can be seen, variations may be made without exceeding the scope of the present invention.

Figure 7 shows present invention anchoring device 1 in use. Anchoring device 1 is inserted into pre-cut slot 55 of horizontal beam 45, shown

-31-

-32-

in its end view of cut wood 51. A staple, nail  
or screw is passed through anchoring device 1  
into joist beam 59. Large staples are preferred  
and simplest for attachment. This anchor  
5 attaches device 1 to joist beam 59 and  
establishes the elevation of top element 2 so as  
to match with slot 55.

Next beam 47 with its slot 57 in its end  
view of cut wood 53 will be placed adjacent to  
10 anchoring device by being slid into position with  
the top element of anchoring device 1 fitting  
into slot 57 and the bottom of beam 47 resting on  
joist 59. By this method, anchoring device 1  
attaches all three boards to one another as the  
15 top element aspects are typically tight-fitting.  
The bottom element also aids in placement and

-32-

-33-

security by fitting under the edge of the beams  
as shown in the Figure. Thus, for example,  
decking boards may be attached without the need  
for nails or screws entering the beams themselves  
5 from the top.

Figure 8 shows a detailed end view of beam  
45 from Figure 7. This is a preferred component  
of the present invention decking system. As can  
be seen, the slot 55 represents a midpoint or  
10 approximate midpoint imaginary line 65 divides  
the beam into an upper or top portion 67, and a  
lower or bottom portion 69. As can be seen, the  
top portion 67 has a greater width  $W_{TB}$ , than the  
bottom portion  $W_{BB}$ . This provides for tightness  
15 of the anchoring device, increases stability and  
hides more of the anchoring device from a top

-33-

-34-

view, enabling tight top portion beam spacing,  
yet enabling thicker anchoring devices for  
strength and stability.

Obviously, numerous modifications and  
5 variations of the present invention are possible  
in light of the above teachings. It is therefore  
understood that within the scope of the appended  
claims, the invention may be practiced otherwise  
than as specifically described herein.

10

-34-

-35-

WHAT IS CLAIMED IS:

1.. An anchoring device for joining three boards, which comprises:

(a) a substantially flat horizontal top element having a top view configuration which includes two sides and has a first predetermined width as measured side to side, said first predetermined width being measured at a maximum width between said two sides, said top element having an imaginary center line;

(b) at least one substantially vertical support member attached to the underside of said top element along said imaginary center line of said top element and extending downwardly therefrom for a predetermined length, said substantially vertical support member having two

-35-

-36-

sides and a second predetermined width as measured side to side at its maximum width; and,

(c) a substantially flat horizontal bottom element having a flat bottom view configuration which includes two sides and has a third predetermined width as measured side to side at its maximum width;

wherein said first predetermined width is greater than both said second predetermined width and third predetermined width, and wherein said third predetermined width is greater than said second predetermined width, and said anchoring device is adapted to maintain said top element in a predetermined position during use for joinder of two adjacent boards which have been pre-cut with receiving slots, and to position said bottom

-36-

-37-

element upon a support board which said two adjacent boards rest for attachment of said anchoring device to said support board for anchoring and support of said two adjacent boards.

2. The anchoring device of claim 1 wherein said bottom element has a generally trapezoidal shape with its greatest width at a trapezoidal base.

3. The anchoring device of claim 1 wherein said vertical support member has a plurality of recesses with support columns located therebetween.

4. The anchoring device of claim 1 wherein said device is made of molded plastic material capable

-37-

-38-

of having a metal fastener driven through.

5. A decking system which comprises:

I. a plurality of decking boards, each decking board having a top, a bottom, two sides, and two ends, and at least one groove located along one of said sides, said groove adapted to receive an anchoring device; and,

II. an anchoring device which comprises:

(a) a substantially flat horizontal top element having a top view configuration which includes two sides said and has a first predetermined width as measured side to side, said first predetermined width being measured a maximum width between said sides, said top element having an imaginary center line;

(b) at least one substantially vertical

-38-

-39-

support member attached to the underside of said top element along said imaginary center line of said top element and extending downwardly therefrom for a predetermined length, said substantially vertical support member having two sides and a second predetermined width as measured side to side at its maximum width; and,

(c) a substantially flat horizontal bottom element having a flat bottom view configuration which includes two sides and has a third predetermined width as measured side to side at its maximum width;

wherein said first predetermined width is greater than both said second predetermined width and third predetermined width, and wherein said third predetermined width is greater than said

-39-

-40-

second predetermined width, and said anchoring device is adapted to maintain said top element in a predetermined position during use for joinder of two adjacent boards which have been pre-cut with receiving slots, and to position said bottom element upon a support board which said two adjacent boards rest for attachment of said anchoring device to said support board for anchoring and support of said two adjacent boards.

6. The decking system of claim 5 wherein said bottom element has a generally trapezoidal shape with its greatest width at a trapezoidal base.

7. The decking system of claim 5 wherein

-40-

-41-

said vertical support member of said anchoring device has a plurality of recesses with support columns located therebetween.

8. The decking system of claim 5 wherein said device is made of molded plastic material capable of having a metal fastener driven through.

9. The decking system of claim 5 wherein said groove establishes an upper half of said board above said groove and a lower half of said board below said groove, wherein said upper half has a greater width than said lower half.

10. The decking system of claim 5 wherein said plurality of decking boards are made of

-41-

-42-

materials selected from the group consisting of synthetic polymers, at least partially foamed synthetic polymer, wood, wood composite, and combinations thereof.

11. An anchoring device for joining three boards, which comprises:

(a) a substantially flat horizontal top element having a top view configuration which includes two parallel sides and has a first predetermined width as measured side to side, said top element having an imaginary center line;

(b) at least one substantially vertical support member attached to the underside of said top element along said imaginary center line of said top element and extending downwardly therefrom for a predetermined length, said

-42-

-43-

substantially vertical support member having two parallel sides and a second predetermined width as measured side to side; and,

(c) a substantially flat horizontal bottom element having a flat bottom view configuration which includes two parallel sides and has a third predetermined width as measured side to side;

wherein said first predetermined width is greater than both said second predetermined width and third predetermined width, and wherein said third predetermined width is greater than said second predetermined width, and said anchoring device is adapted to maintain said top element in a predetermined position during use for joinder of two adjacent boards which have been pre-cut with receiving slots, and to position said bottom

-43-

-44-

element upon a support board which said two adjacent boards rest for attachment of said anchoring device to said support board for anchoring and support of said two adjacent boards.

12. The anchoring device of claim 11 wherein said bottom element has a generally trapezoidal shape with its greatest width at a trapezoidal base.

13. The anchoring device of claim 11 wherein said vertical support member has a plurality of recesses with support columns located therebetween.

14. The anchoring device of claim 11 wherein said device is made of molded plastic material capable

-44-

-45-

of having a metal fastener driven through.

15. A decking system which comprises:

I. a plurality of decking boards, each decking board having a top, a bottom, two sides, and two ends, and at least one groove located along one of said sides, said groove adapted to receive an anchoring device; and,

II. an anchoring device which comprises:

(a) a substantially flat horizontal top element having a top view configuration which includes two parallel sides and has a first predetermined width as measured side to side, said top element having an imaginary center line;

(b) at least one substantially vertical support member attached to the underside of said top element along said imaginary center line of

-45-

-46-

said top element and extending downwardly therefrom for a predetermined length, said substantially vertical support member having two parallel sides and a second predetermined width as measured side to side; and,

(c) a substantially flat horizontal bottom element having a flat bottom view configuration which includes two parallel sides and has a third predetermined width as measured side to side;

wherein said first predetermined width is greater than both said second predetermined width and third predetermined width, and wherein said third predetermined width is greater than said second predetermined width, and said anchoring device is adapted to maintain said top element in a predetermined position during use for joinder

-46-

-47-

of two adjacent boards which have been pre-cut with receiving slots, and to position said bottom element upon a support board which said two adjacent boards rest for attachment of said anchoring device to said support board for anchoring and support of said two adjacent boards.

16. The decking system of claim 15 wherein said bottom element has a generally trapezoidal shape with its greatest width at a trapezoidal base.

17. The decking system of claim 15 wherein said vertical support member of said anchoring device has a plurality of recesses with support columns located therebetween.

-47-

-48-

18. The decking system of claim 15 wherein said device is made of molded plastic material capable of having a metal fastener driven through.

19. The decking system of claim 15 wherein said groove establishes an upper half of said board above said groove and a lower half of said board below said groove, wherein said upper half has a greater width than said lower half.

20. The decking system of claim 15 wherein said plurality of decking boards are made of materials selected from the group consisting of synthetic polymers, at least partially foamed synthetic polymer, wood, wood composite, and combinations thereof.

-48-

1/2

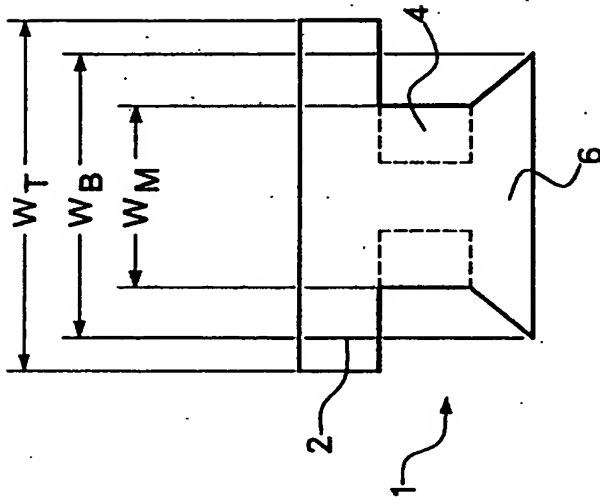


Fig. 4

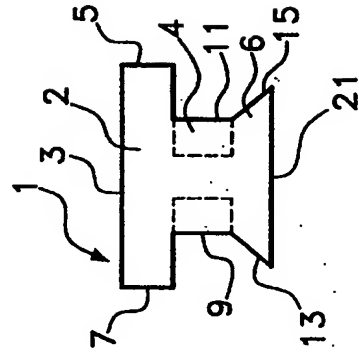


Fig. 3

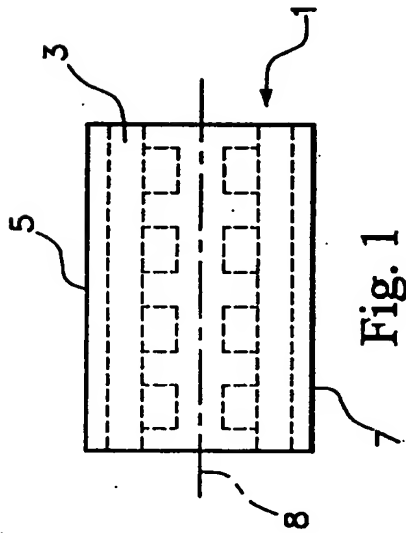


Fig. 1

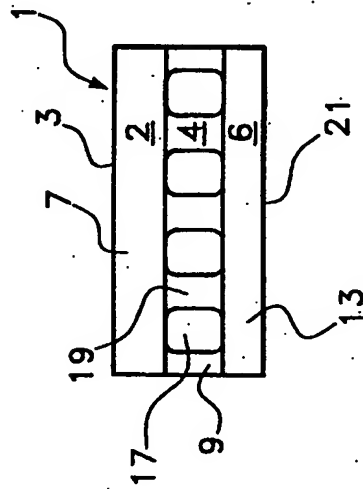


Fig. 2

2/2

